MondoClad™

FIXING SYSTEMS – ROUTED

04 HORIZONTAL JOINT DETAIL Z ANGLE

Labels:
- RIVET OR SCREW Z ANGLE
- ISOLATION TAPE BETWEEN STEEL & ALUMINIUM SURFACES
- SARKING BY OTHERS
- WALL CLADDING
- TOP HAT
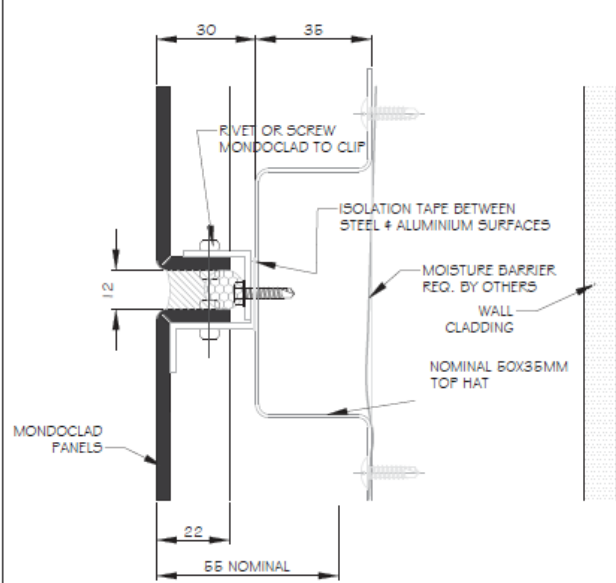- MONDOCLAD PANELS

Dimensions: 30, 12, 22

THIS INFORMATION IS GENERIC IN NATURE & SUPPLIED FOR GUIDANCE PURPOSES ONLY. JOINT WIDTHS WILL VARY TO SUIT PANEL SIZE & SEALANT USED. TOP HAT DIMENSIONS ARE NOMINAL. DIMENSIONS, SPACING, SPANS & STIFFENER REQUIREMENTS WILL NEED TO CONFIRMED BY A SUITABLY QUALIFIED PROFESSIONAL TO SUIT THE SPECIFIC APPLICATION.

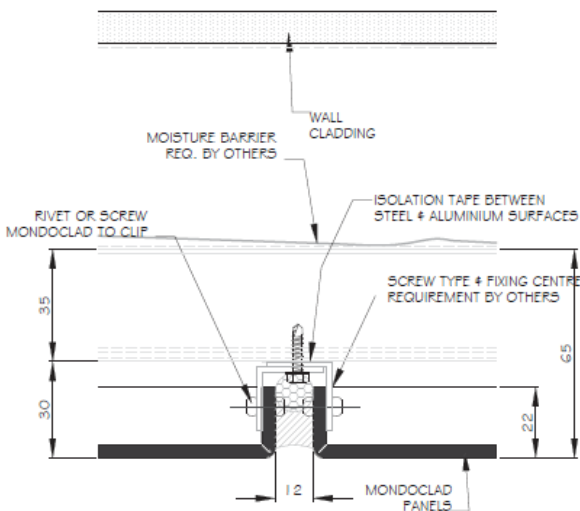HORIZONTAL JOINT DETAIL Z ANGLE | FIXED CASSETTE ROUTE SYSTEM

04 HORIZONTAL JOINT DETAIL

Labels:
- RIVET OR SCREW MONDOCLAD TO CLIP
- ISOLATION TAPE BETWEEN STEEL & ALUMINIUM SURFACES
- MOISTURE BARRIER REQ. BY OTHERS
- WALL CLADDING
- NOMINAL 50X35MM TOP HAT
- MONDOCLAD PANELS

Dimensions: 30, 35, 12, 22, 55 NOMINAL

THIS INFORMATION IS GENERIC IN NATURE & SUPPLIED FOR GUIDANCE PURPOSES ONLY. JOINT WIDTHS WILL VARY TO SUIT PANEL SIZE & SEALANT USED. TOP HAT DIMENSIONS ARE NOMINAL. DIMENSIONS, SPACING, SPANS & STIFFENER REQUIREMENTS WILL NEED TO CONFIRMED BY A SUITABLY QUALIFIED PROFESSIONAL TO SUIT THE SPECIFIC APPLICATION.
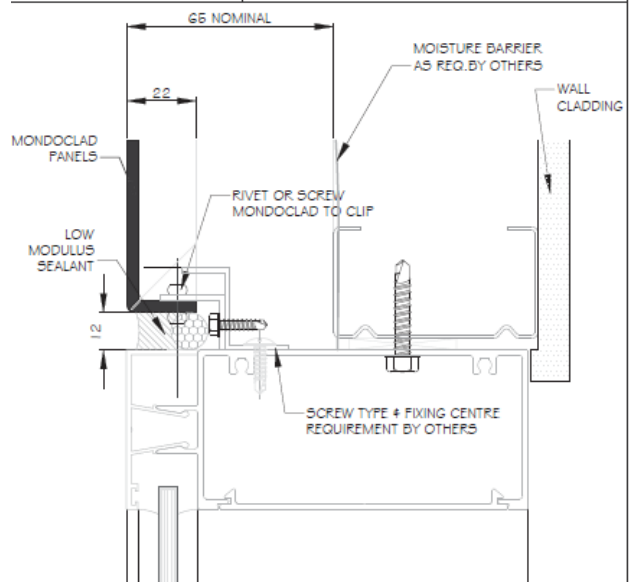
HORIZONTAL JOINT DETAIL | FIXED CASSETTE ROUTE SYSTEM

05 VERTICAL JOINT

Labels:
- MOISTURE BARRIER REQ. BY OTHERS
- WALL CLADDING
- RIVET OR SCREW MONDOCLAD TO CLIP
- ISOLATION TAPE BETWEEN STEEL & ALUMINIUM SURFACES
- SCREW TYPE & FIXING CENTRE REQUIREMENT BY OTHERS
- MONDOCLAD PANELS

Dimensions: 35, 30, 65, 22, 12

THIS INFORMATION IS GENERIC IN NATURE & SUPPLIED FOR GUIDANCE PURPOSES ONLY. JOINT WIDTHS WILL VARY TO SUIT PANEL SIZE & SEALANT USED. TOP HAT DIMENSIONS ARE NOMINAL. DIMENSIONS, SPACING, SPANS & STIFFENER REQUIREMENTS WILL NEED TO CONFIRMED BY A SUITABLY QUALIFIED PROFESSIONAL TO SUIT THE SPECIFIC APPLICATION.
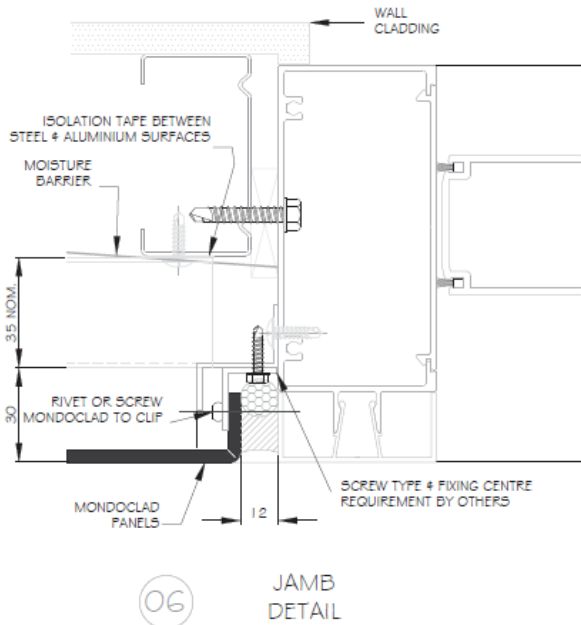
VERTICAL JOINT DETAIL | FIXED CASSETTE ROUTE SYSTEM

02 WINDOW HEAD DETAIL

Labels:
- MOISTURE BARRIER AS REQ. BY OTHERS
- WALL CLADDING
- MONDOCLAD PANELS
- RIVET OR SCREW MONDOCLAD TO CLIP
- LOW MODULUS SEALANT
- SCREW TYPE & FIXING CENTRE REQUIREMENT BY OTHERS

Dimensions: 65 NOMINAL, 22, 12

THIS INFORMATION IS GENERIC IN NATURE & SUPPLIED FOR GUIDANCE PURPOSES ONLY. JOINT WIDTHS WILL VARY TO SUIT PANEL SIZE & SEALANT USED. TOP HAT DIMENSIONS ARE NOMINAL. DIMENSIONS, SPACING, SPANS & STIFFENER REQUIREMENTS WILL NEED TO CONFIRMED BY A SUITABLY QUALIFIED PROFESSIONAL TO SUIT THE SPECIFIC APPLICATION.
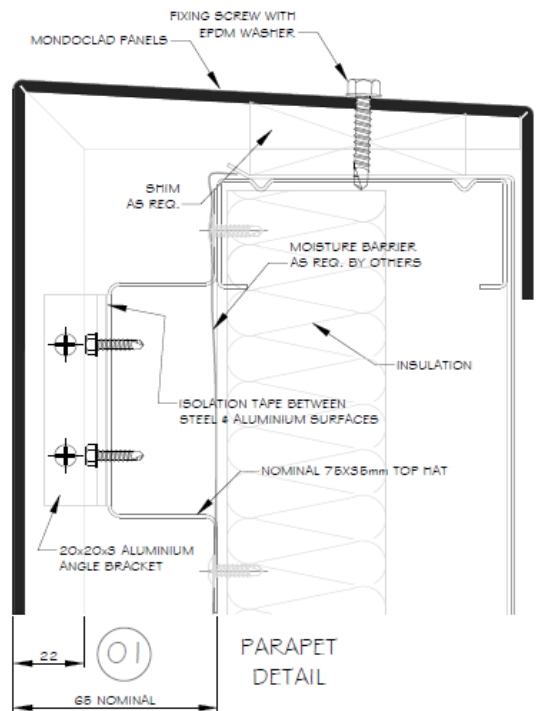
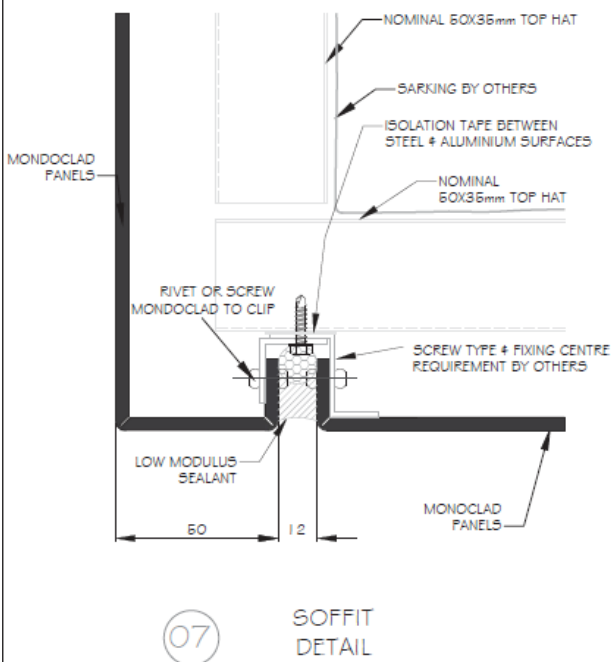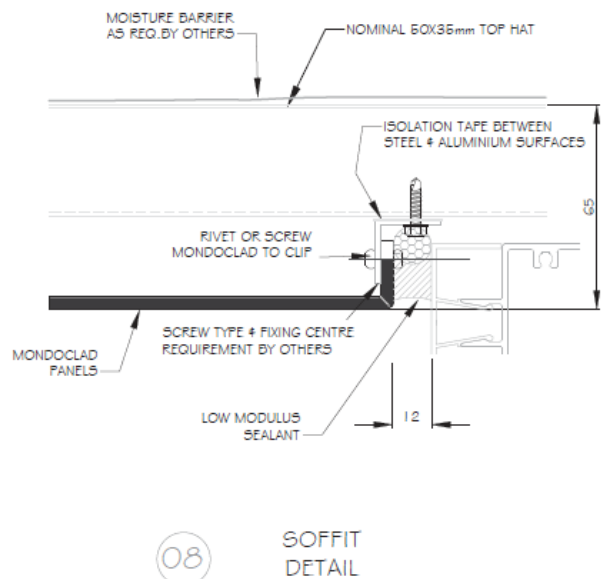WINDOW HEAD DETAIL | FIXED CASSETTE ROUTE SYSTEM

MondoClad™

FIXING SYSTEMS – ROUTED

JAMB DETAIL (06)

- WALL CLADDING
- ISOLATION TAPE BETWEEN STEEL & ALUMINIUM SURFACES
- MOISTURE BARRIER
- 35 NOM.
- 30
- RIVET OR SCREW MONDOCLAD TO CLIP
- MONDOCLAD PANELS
- SCREW TYPE & FIXING CENTRE REQUIREMENT BY OTHERS
- 12

(06) JAMB DETAIL

JAMB DETAIL — FIXED CASSETTE ROUTE SYSTEM

PARAPET DETAIL (01)

- FIXING SCREW WITH EPDM WASHER
- MONDOCLAD PANELS
- SHIM AS REQ.
- MOISTURE BARRIER AS REQ. BY OTHERS
- INSULATION
- ISOLATION TAPE BETWEEN STEEL & ALUMINIUM SURFACES
- NOMINAL 75X35mm TOP HAT
- 20x20x3 ALUMINIUM ANGLE BRACKET
- 22
- 65 NOMINAL

(01) PARAPET DETAIL

PARAPET DETAIL — FIXED CASSETTE ROUTE SYSTEM

SOFFIT DETAIL (07)

- MONDOCLAD PANELS
- NOMINAL 50X35mm TOP HAT
- SARKING BY OTHERS
- ISOLATION TAPE BETWEEN STEEL & ALUMINIUM SURFACES
- NOMINAL 50X35mm TOP HAT
- RIVET OR SCREW MONDOCLAD TO CLIP
- SCREW TYPE & FIXING CENTRE REQUIREMENT BY OTHERS
- LOW MODULUS SEALANT
- MONOCLAD PANELS
- 50
- 12

(07) SOFFIT DETAIL

SOFFIT DETAIL — FIXED CASSETTE ROUTE SYSTEM

SOFFIT DETAIL (08)

- MOISTURE BARRIER AS REQ. BY OTHERS
- NOMINAL 50X35mm TOP HAT
- ISOLATION TAPE BETWEEN STEEL & ALUMINIUM SURFACES
- 65
- RIVET OR SCREW MONDOCLAD TO CLIP
- SCREW TYPE & FIXING CENTRE REQUIREMENT BY OTHERS
- MONDOCLAD PANELS
- LOW MODULUS SEALANT
- 12

(08) SOFFIT DETAIL

SOFFIT DETAIL — FIXED CASSETTE ROUTE SYSTEM

MondoClad™

FIXING SYSTEMS – ROUTED

SILICONE SEAL

MONDOCLAD PANELS

Ø12

Ø6

20x20x3 ALUMINIUM ANGLE BRACKET

NOMINAL 50X35mm TOP HAT

ISOLATION TAPE BETWEEN STEEL & ALUMINIUM SURFACES

WALL CLADDING

MOISTURE BARRIER AS REQ. BY OTHERS

WINDOW SILL DETAIL

03

THIS INFORMATION IS GENERIC IN NATURE & SUPPLIED FOR GUIDANCE PURPOSES ONLY. JOINT WIDTHS WILL VARY TO SUIT PANEL SIZE & SEALANT USED. TOP HAT DIMENSIONS ARE NOMINAL. DIMENSIONS, SPACING, SPANS & STIFFENER REQUIREMENTS WILL NEED TO CONFIRMED BY A SUITABLY QUALIFIED PROFESSIONAL TO SUIT THE SPECIFIC APPLICATION.

WINDOW SILL DETAIL

FIXED CASSETTE ROUTE SYSTEM